


# Resitec - Typ RS 400, DN 70

## Massblatt / fiche technique des mesures

mit Schlitzrost barfuss  
begehrbar

caillebotis avec fentes  
traversée pied nus

RS400.70.2.150




RS511.2.145

mit Lochrost 3 mm begehrbar  
+ befahrbar mit Rollstuhl  
(behindertengerecht)

grille perforée 3 mm traversée  
pied nus, carrossable pour  
chaise roulante (handicapé)

RS400.70.3.150




RS511.3.145

mit Lochrost 6 mm  
befahrbar



grille perforée 6 mm  
carrossable

RS400.70.6.150




RS512.6.145

RS03 / Rost verschraubt / grille vissée

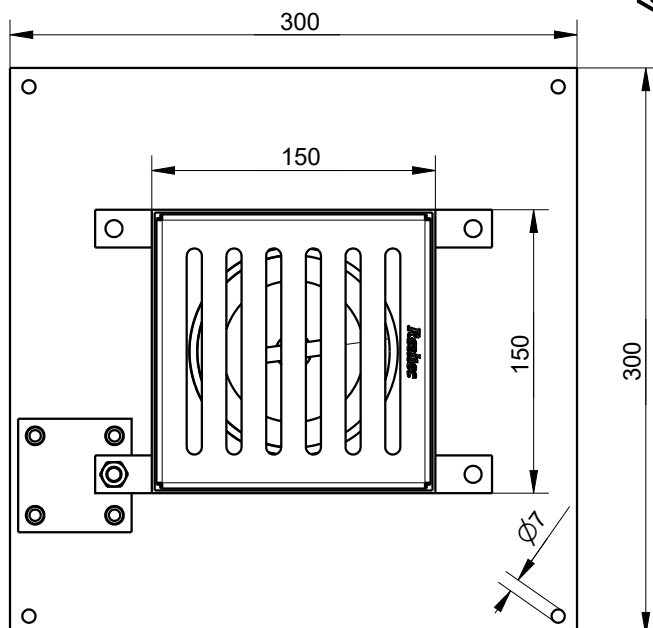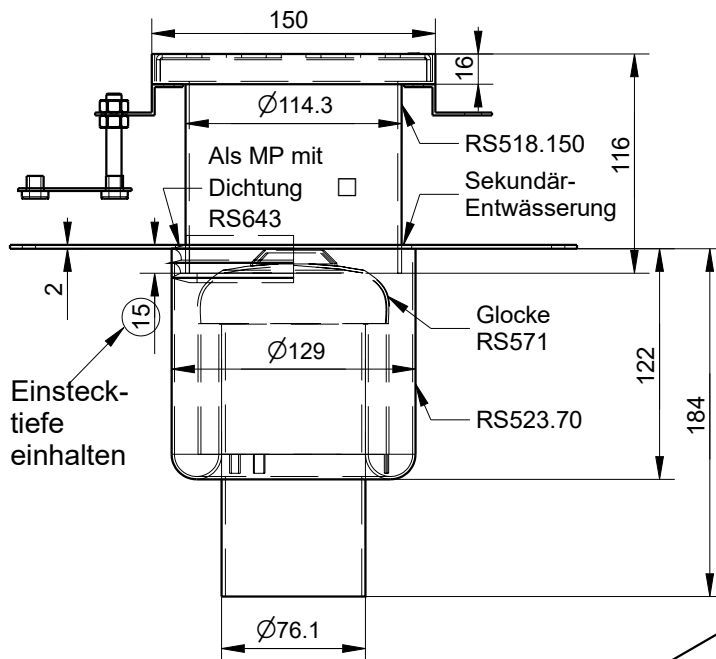

auf Wunsch  
Kleblech  
mit Epoxigrund  
gründiert und  
mit Quarzsand  
abgestreut  
plaque de  
collage avec  
couverture  
d'epoxi et  
sable quartz

Kleblech  
aufgeraut

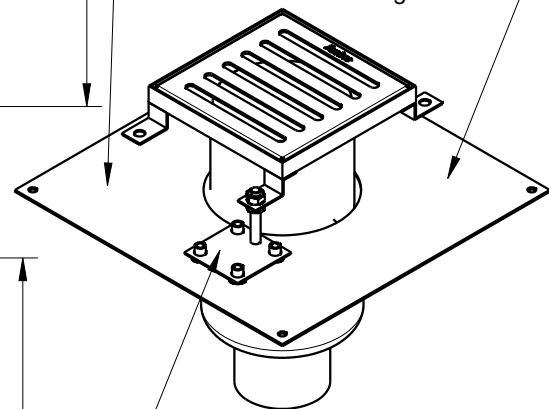

Montageset Typ I  
RS050.100



- Rückstaudichtung RS644.70  
joint de refoulement RS644.70
- Übergangsbride  
Collier d'union intermédiaire