


Resitec - Typ RS 400d, DN 60

Massblatt / fiche technique des mesures

mit Schlitzrost barfuss
begehr

caillebotis avec fentes
traversée pied nus

RS400d.60.2.150




RS511.2.145

mit Lochrost 3 mm begehbar
+ befahrbar mit Rollstuhl
(behindertengerecht)

grille perforée 3 mm traversée
pied nus, carrossable pour
chaise roulante (handicapé)

RS400d.60.3.150




RS511.3.145

mit Lochrost 6 mm
befahrbar




grille perforée 6 mm
carrossable

RS400d.60.6.150



RS512.6.145

RS03 / Rost verschraubt / grille vissée

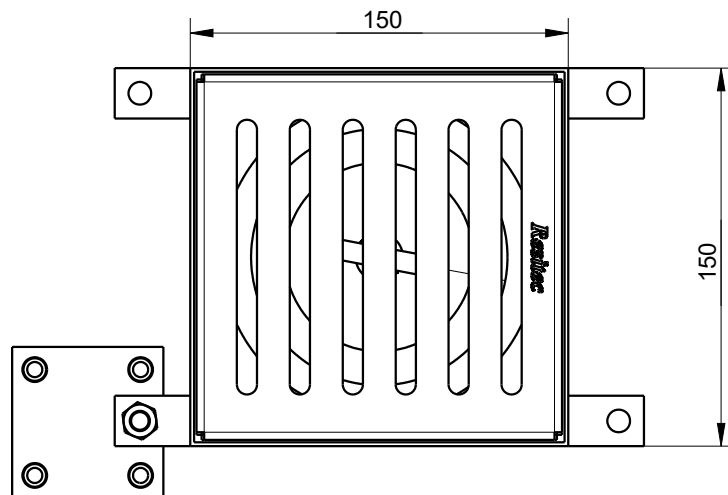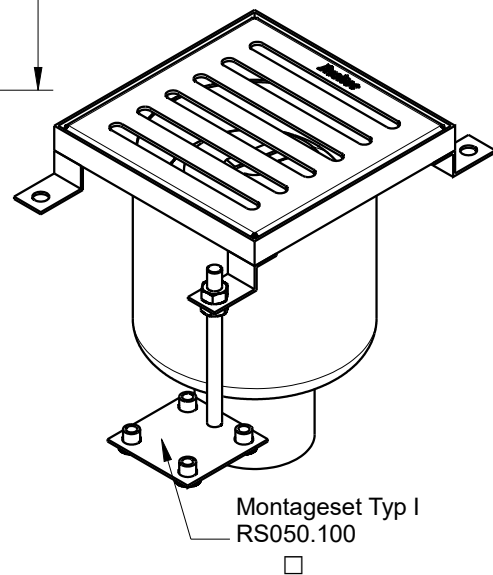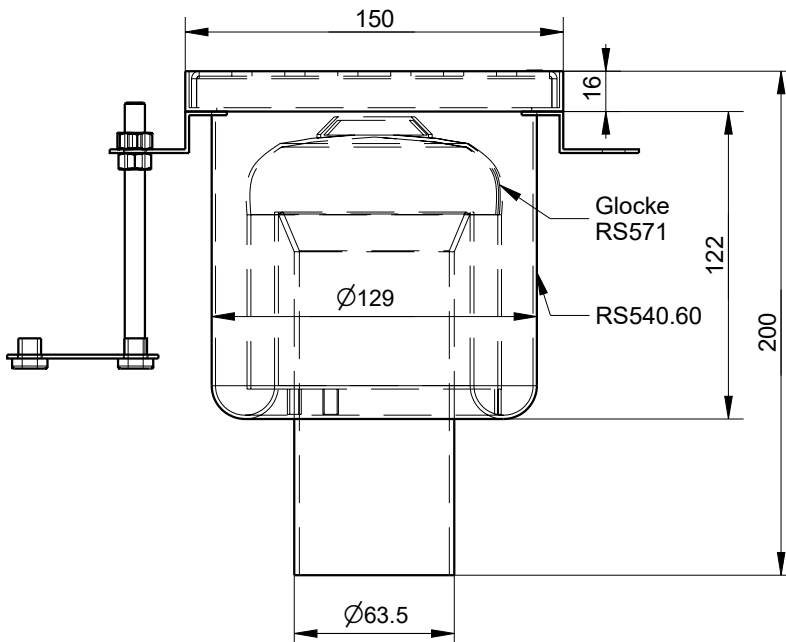

- Rückstaudichtung RS644.60
joint de refoulement RS644.60
- Übergangsbride
Collier d'union intermédiaire