

Resitec - Typ RS 500K, DN 80

Massblatt / fiche technique des mesures

mit Schlitzrost barfuss
begehrbar

mit Lochrost 6 mm
befahrbar

mit Gitterrost
befahrbar

caillebotis avec fentes
traversée pied nus


grille perforée 6 mm
carrossable

grille caillebotis
carrossable


- RS500K.80.2.245.B
- (B=besandet)
- RS500K.80.2.245

- RS500K.80.6.245.B
- (B=besandet)
- RS500K.80.6.245


- RS500K.80.G.245.B
- (B=besandet)
- RS500K.80.G.245



RS511.2.239




RS512.6.239



RS513A.239


RS03 / Rost verschraubt / grille vissée

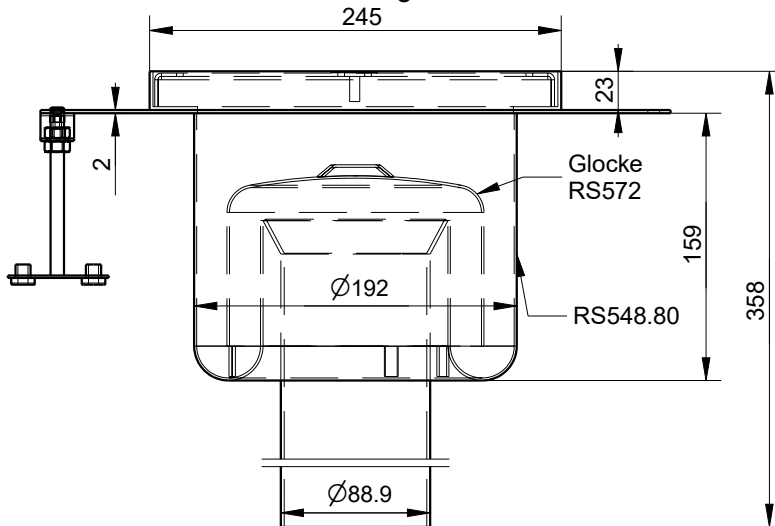

auf Wunsch
Kleblech
mit Epoxigrund
gründiert und
mit Quarzsand
abgestreut

plaque de
collage avec
couverture
d'epoxi et
sable quartz

Kleblech
aufgeraut

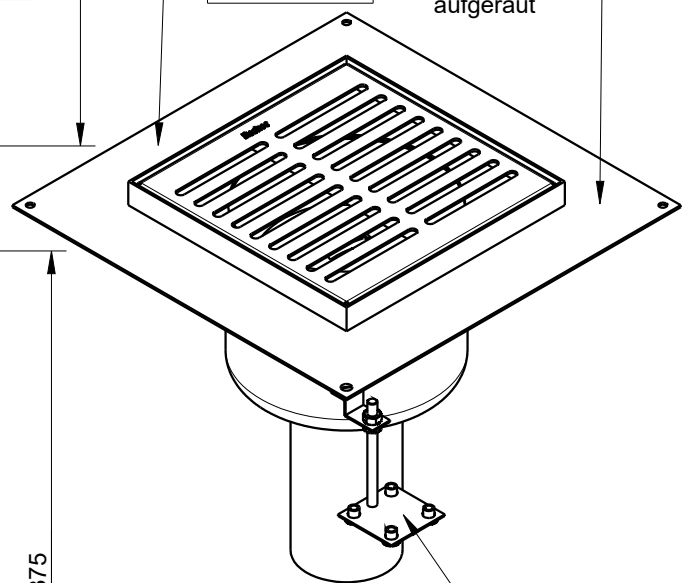

Montageset Typ II
RS051.100

- Rückstaudichtung RS644.80
joint de refoulement RS644.80
- Übergangsbride
Collier d'union intermédiaire

