

Resitec - Typ RS 222, DN 60

Massblatt / fiche technique des mesures

mit Schlitzrost barfuss
begehrbar

mit Lochrost 3 mm begehrbar
+ befahrbar mit Rollstuhl
(behindertengerecht)


mit Lochrost 6 mm
befahrbar

caillebotis avec fentes
traversée pied nus

grille perforée 3 mm traversée
pied nus, carrossable pour
chaise roulante (handicapé)


grille perforée 6 mm
carrossable

RS222.60.2.150




RS511.2.145

RS222.60.3.150





RS511.3.145

RS222.60.6.150




RS512.6.145

RS03 / Rost verschraubt / grille vissée

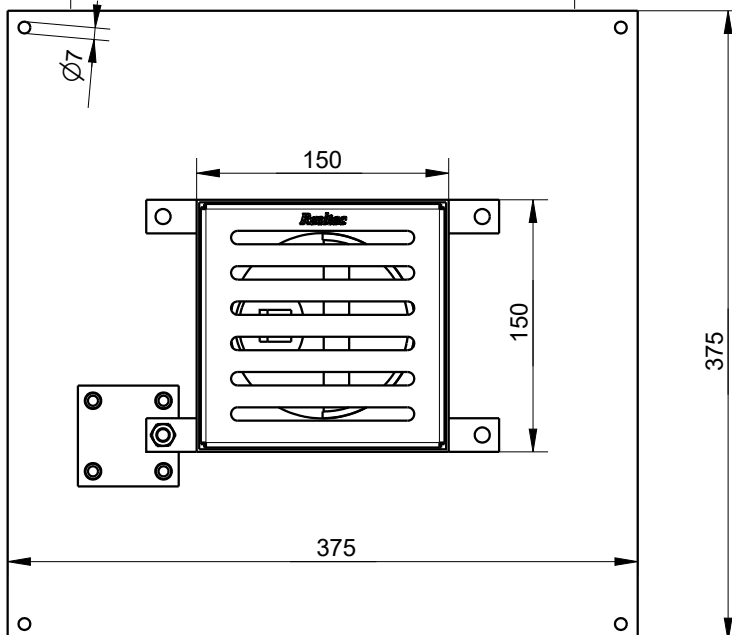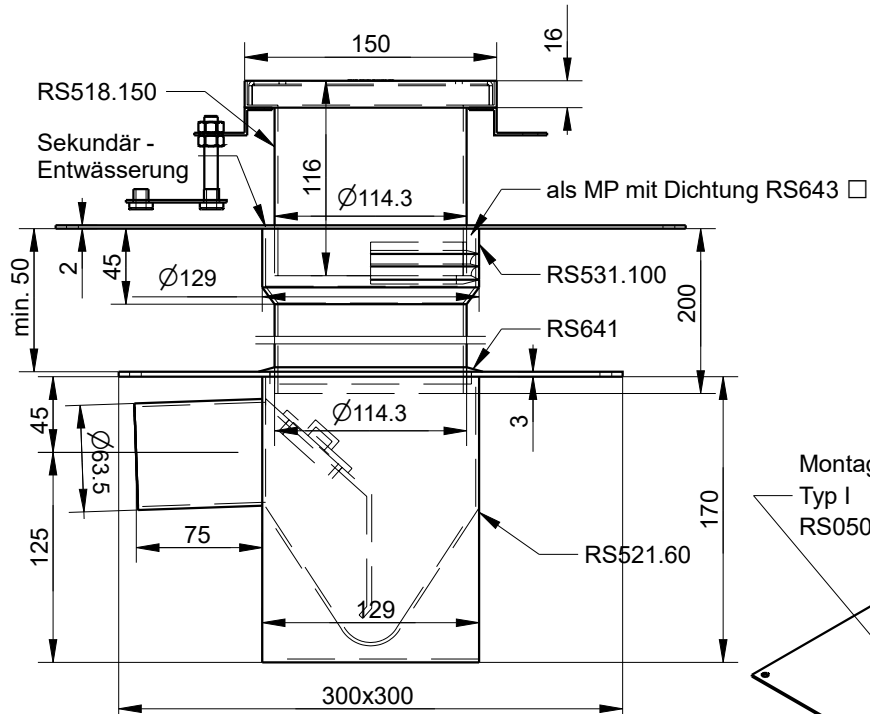

auf Wunsch
Klebeblech
mit Epoxigrund
gründert und
mit Quarzsand
abgestreut
plaque de
collage avec
couverture
d'epoxi et
sable quartz

Montageset
Typ I
RS050.100

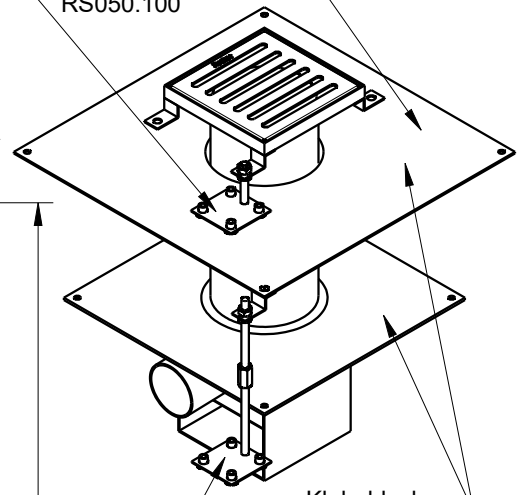

Klebeblech
aufgeraut

Montageset
Typ III
RS051.200



Übergangsbride
Collier d'union intermédiaire